


主軸頭 >>>

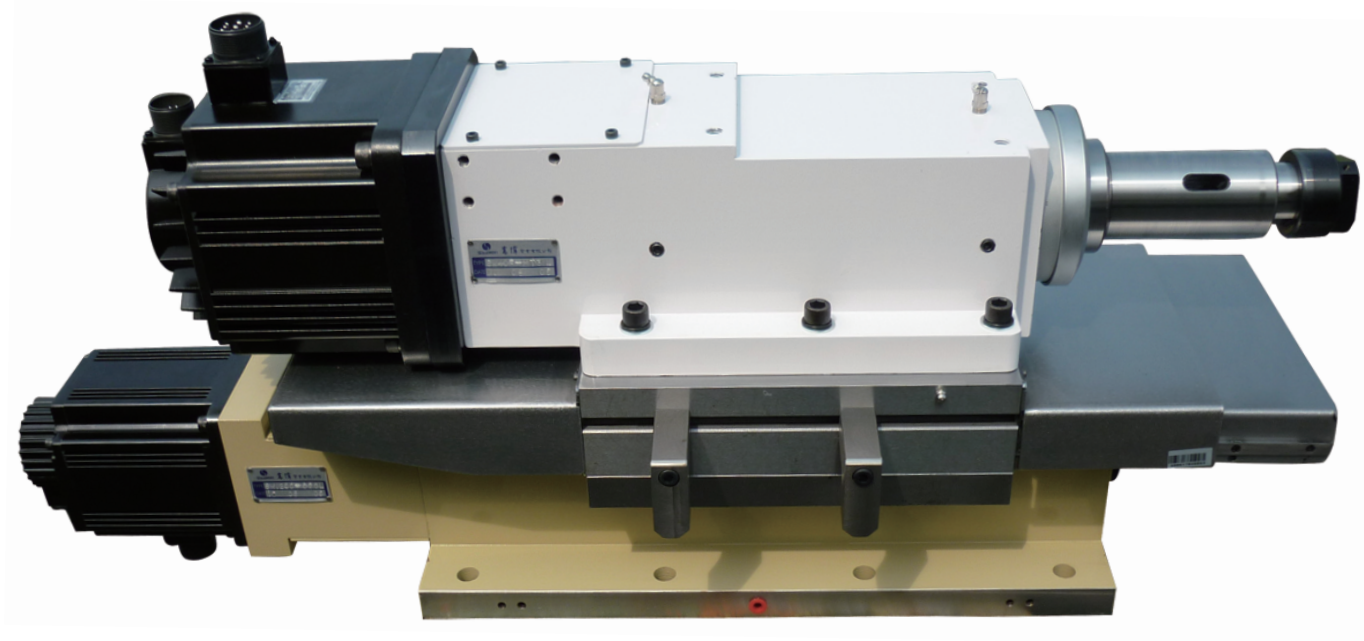

SW-40F

搪銑主軸頭 Boring & Milling Spindles Units

| 規格 Norms | Model                | SW-40F                  | SW-40FH       |
|----------|----------------------|-------------------------|---------------|
| 主軸軸承     | Spindle Bearing      | 32208/6208Z-32207/6207Z | 7208-2 7207-2 |
| 容許轉速     | Spindle Max. Speed   | 2500RPM                 | 8000RPM       |
| 上升溫度     | Temperature Rise     | 20°C                    | 20°C          |
| 容許馬力     | Maximum use of motor | 3KW                     |               |
| 主軸真圓度    | Spindle Roundness    | 主軸與刀具配合面 MAX: 0.005mm   |               |
| 潤滑方式     | Lubrication method   | Grease 潤滑油脂             |               |
| 淨重       | Net Weight           | 78kg                    |               |

工型伺服滑台 Servo Slide

| 規格 Norms | Model                | PI250-300/520                      |
|----------|----------------------|------------------------------------|
| 滾珠螺桿     | Ballscrews           | φ32 X P 5X C5雙螺帽(可指定等級)            |
| 行程       | Stroke               | 200mm                              |
| 容許馬力     | Maximum use of motor | 2KW                                |
| 潤滑方式     | Lubrication method   | Lithium soap based grease 含鋰皂基潤滑油脂 |
| 淨重       | Net Weight           | 125kg                              |

SW40F-MT3

